

Luneburg lens Antenna

OLLA-1726

Luneburg lens antenna is a spherical dielectric lens antenna, which focuses microwaves to the focal point through dielectric. Luneburg lens antenna is widely used in microwave, millimeter wave, mobile communication, satellite communication and radio astronomy due to its high gain, low profile and multi-feed multi-beam operation.

The distribution has sphere symmetry, which makes any point on the Luneburg lens sphere the focal point of the lens sphere. Therefore, as long as the position of the antenna feed on the spherical surface is controlled, the electromagnetic radiation beam can be directed in any direction, and there is no defocus problem as the position of the feed on the spherical surface changes.

Due to the medium distribution characteristics of the lens, the antenna is relatively insensitive to the frequency band of electromagnetic waves, so the frequency band can be very wide.

Customize Luneburg lens antenna are offered for the frequency range of 2 to 110 GHz. The standard gain value and corresponding half power beamwidth at 1.7 GHz-2.6 GHz is 15 dBi and 8 degrees.

Other gain values are available as custom order. The 3D printed antenna can be connected to standard waveguide interface. Other customized feeds are also available.



Features

- _____ All-dielectric
- _____ Light weight
- _____ Low cost
- _____ Low side lobe
- _____ Easy configuration
- _____ Customized design


Applications

- _____ Antenna reference
- _____ Radiation element for sub-systems
- _____ Antenna mounted on L-band waveguide


Electrical Specifications

Frequency Range(GHz)	(1.7-2.6)GHz
Gain(dB)	15 dBi
Return Loss (dB)	< -20 dB
Beamwidth	30 degree@2.2GHz
Polarization type	All polarizations
Sidelobe Leve	-20 dB
Diameter dimensions	150mm
Antenna weight	120 g

PRODUCT DIMENSIONS

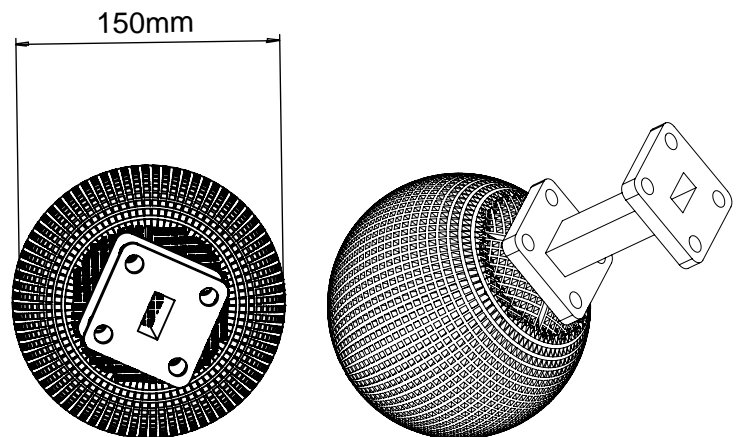

VSWR

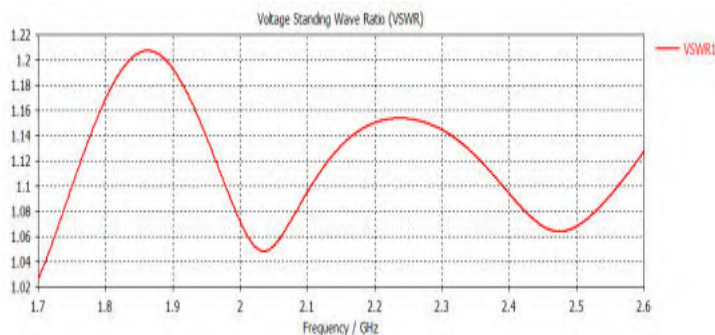

GAIN

