


2.92mm (K) Jack (Female) 4 Hole .375 Square D360-P12-F02-B



This is model D360-P12-F02-B, 2.92mm connectors are durable, operational temperature rating of -55°C to +135°C. 2.92mm connectors provide mode-free operation through 40 GHz, offering well-matched impedance, excellent repeatability, lowest VSWR, RF leakage (≤ -100 dB).

Features

low VSWR

free through 40 GHz and less than -100 dB RF leakage.

Available Accessories

50 ohm Seal

Applications

Telecom Communication

Sub-assemblies

Radio equipment and instruments

Wireless Communication


Test Labs

Instrumentations

Electrical Specifications

Frequency	(18-40) GHz
Flange Size	.375 SQ
Mounting	4-Hole Flange
Hermetic Seal Available	YES
Accepts Pin Diameter	.012
Gender	Female
Flange Hole Diameter	0.067
Tools, C-bore	T-291-5
Tools, Solder	T-212-15

PRODUCT DIMENSIONS

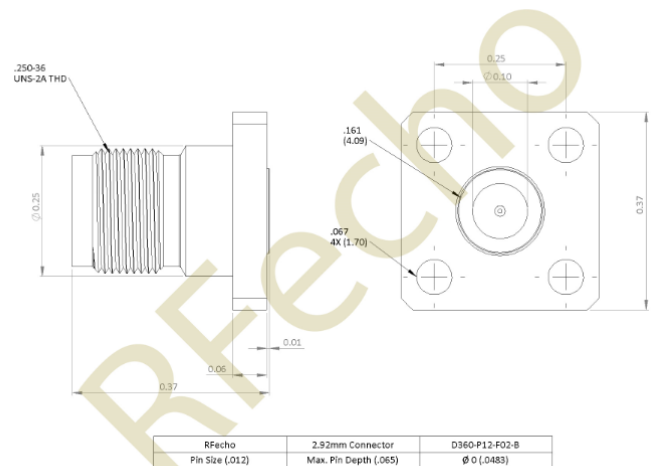

Isolation & VSWR

